

## DGA GFF TV (909 705)

- Frequency range for analogue and digital TV, also suitable for reverse LAN channels
- Arresters of type FF and GFF with integrated measuring output
- Three types for adapted use in conformity with the lightning protection zone concept at the boundaries from  $0_A - 2$  (combined lightning current and surge arresters of type GFF),  $0_A - 1$  (lightning current arresters of type GF) and  $1 - 2$  (surge arresters of type FF)



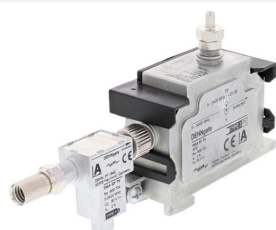


Figure without obligation

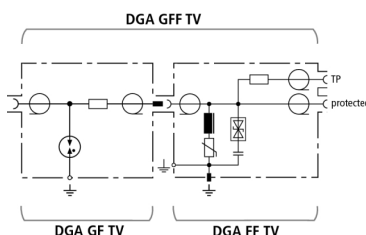

Basic circuit diagram DGA GFF TV – consisting of DGA GF TV and DGA FF TV

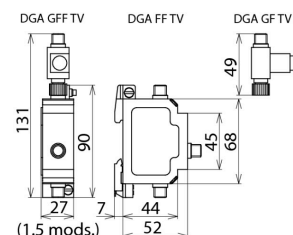

Dimension drawing DGA GFF TV – consisting of DGA GF TV and DGA FF TV

DGA ... TV arresters with F connection for remote supply protect 75 ohm satellite and broadband cable systems and fulfil the high shielding requirements of class A according to EN 50083-2. They allow space-saving installation in all common TV and satellite applications and are available as lightning current arresters, surge arresters as well as combined lightning current and surge arresters with integrated measuring output, allowing the system to be easily tested.

| Type  | DGA GFF TV  |
|---|---|
| Part No.  | 909 705   |
| SPD class   | <b>TYPE I</b> <input checked="" type="checkbox"/> <b>TYPE S/PI</b> <input type="checkbox"/> |
| Max. continuous operating voltage (d.c.) ( $U_c$ )          | 24 V  |
| Nominal current ( $I_L$ )                                   | 2 A   |
| D1 Lightning impulse current (10/350 $\mu$ s) ( $I_{imp}$ ) | 2.5 kA  |
| C2 Nominal discharge current (8/20 $\mu$ s) ( $I_n$ )       | 10 kA   |
| Voltage protection level for $I_{imp}$ D1 ( $U_p$ )         | $\leq 230$ V  |
| Voltage protection level for $I_n$ C2 ( $U_p$ )             | $\leq 300$ V  |
| Voltage protection level at 1 kV/ $\mu$ s C3 ( $U_p$ )      | $\leq 60$ V   |
| Frequency range   | d.c. / 5-2400 MHz   |
| Insertion loss 5-862 MHz typ.                               | 1.7 dB  |
| Insertion loss 862-2400 MHz typ.                            | 1.9 dB  |
| Return loss (5-8 MHz)                                       | $\geq 10$ dB  |
| Return loss (8-47 MHz)                                      | $\geq 14$ dB  |
| Return loss (47-2400 MHz)                                   | $\geq 18$ dB (-1.5 dB/octave)   |
| Return loss test socket (5-47 MHz)                          | $\geq 18$ dB  |
| Test socket connection loss                                 | 20 dB   |
| Shield attenuation 5-300 MHz                                | $\geq 85$ dB  |
| Shield attenuation 300-470 MHz                              | $\geq 80$ dB  |
| Shield attenuation 470-1000 MHz                             | $\geq 75$ dB  |
| Shield attenuation 1000-2400 MHz                            | $\geq 55$ dB  |
| Characteristic impedance (Z)                                | 75 ohms   |
| Operating temperature range ( $T_U$ )                       | -40 °C ... +80 °C   |
| Degree of protection (if lines are connected)               | IP 30   |
| For mounting on   | 35 mm DIN rails acc. to EN 60715 or wall mounting   |
| Connection (input / output)                                 | F socket / F socket   |
| Earthing via  | DIN rail or screw connection  |
| Enclosure material  | metal   |
| Colour  | bare surface  |
| Test standards  | IEC 61643-21 / EN 61643-21  |
| Accessories   | 2x F plug   |
| Weight  | 283 g   |
| Customs tariff number (Comb. Nomenclature EU)               | 85363010  |
| GTIN  | 4013364105706   |
| PU  | 1 pc(s)   |

We reserve the right to introduce changes in performance, configuration and technology, dimensions, weights and materials in the course of technical progress. The figures are shown without obligation.